

1 **TITLE:**

2 **Analysis of the product streams obtained on butanosolv pretreatment of draff**

3

4 **AUTHORS:**

5 Flora Foltanyi,^[a,b] Julie E. Hawkins,^[c] Isabella Panovic,^[a] Eve J. Bird,^[d] Tracey Gloster,^{*[b]} Christopher S.
6 Lancefield,^{*[a]} and Nicholas J. Westwood^{*[a]}

7 [a] EaStCHEM School of Chemistry and Biomedical Sciences Research Complex, University of St
8 Andrews, North Haugh, St Andrews, Fife (UK) KY16 9ST

9 [b] School of Biology and Biomedical Sciences Research Complex, University of St Andrews,
10 North Haugh, St Andrews, Fife (UK) KY16 9ST

11 [c] Biofuel Research Centre, School of Applied Sciences, Edinburgh Napier University,
12 9 Sighthill Court, Edinburgh (UK) EH11 4BN

13 [d] Dr E. J. Bird, Celtic Renewables LTD, Edinburgh Napier University, 9 Sighthill Court, Edinburgh
14 (UK) EH11 4BN

15 E-mail: tmg@st-andrews.ac.uk, cs19@st-andrews.ac.uk, njw3@st-andrews.ac.uk

16

17

18 **HIGHLIGHTS:**

- 19
- A scalable pretreatment of the by-product draff using butanol gave three product streams
 - A *pseudo*-lignin product stream was characterised in detail
 - The hemicellulose-derived product stream contained butoxylated monosaccharides that
22 were convert back to native sugars using chemical and enzymatic methods

- 1 • The cellulose-containing product stream was converted to glucose and fermented to give
2 butanol completing a circular economy-type approach


3

4 **KEYWORDS:**

5 Sustainable Chemistry • Biomass • Draff • ABE fermentation • hemicellulose

6

7 **GRAPHICAL ABSTRACT:**

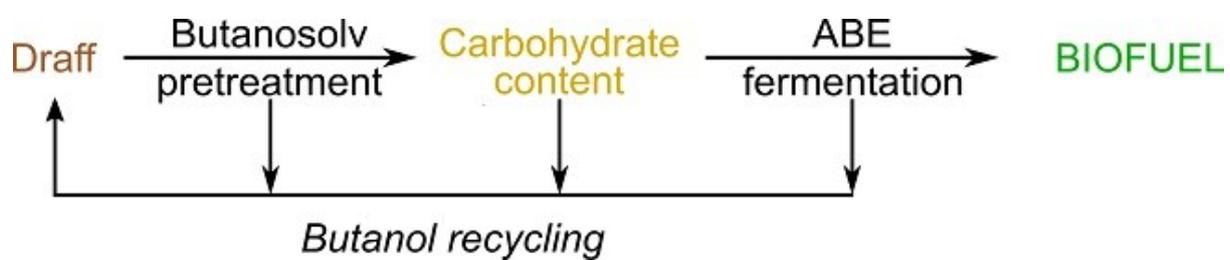

8

9

1

2 **ABSTRACT:**

3 The efficient use of biomass-derived waste streams from the food and drink industry is very
4 important for achieving a circular economy. In this work, a pretreatment based on 1-butanol
5 (butanosolv) was used to fractionate draff, a by-product from the brewing and distilling industries,
6 leading to a solid pulp, a hemicellulose derived-fraction and a *pseudo* lignin. The pulp was enriched
7 in glucans and showed a 4-fold improvement in enzymatic hydrolysis experiments relative to the
8 starting biomass. The pulp could be fermented in an ABE process producing 32g/100g of solvents.
9 The hemicellulose-derived fraction was analysed by 2D HSQC NMR and found to contain a mixture of
10 predominantly butoxylated monosaccharides. The hydrolase enzymes present in Cellic® CTec3 were
11 used to hydrolyse selectively the glucose and xylose derived butyl β -pyranose monomers.
12 Alternatively, non-selective hydrolysis of both anomers was achieved using TFA/H₂O giving native
13 sugars for fermentation and recovered 1-butanol. A detailed characterization of the *pseudo* lignin
14 was also achieved.

15

16 155 words

17

1

2 **1 INTRODUCTION**

3 A decrease in our reliance on non-renewable fossil fuels and an increase in the use of renewable
4 resources to produce clean and green energy is essential to attain a sustainable society.[1] In
5 parallel, the steady rise in the level of waste being generated presents a challenge for today's
6 society.[2] Attempts to overcome both of these challenges have led to the development of a range
7 of technologies for the conversion of biowaste to bioenergy.[1] The major component of biowaste is
8 biomass[1] and as a result biomass processing has become the focus of different bioenergy
9 generating technologies, including in the context of the work discussed below, fermentation of
10 agricultural waste to produce acetone, butanol and ethanol (ABE) as biofuels and commodity
11 chemicals.[3] Ideally, the developed technologies are scalable enabling the establishment of biomass
12 processing plants called biorefineries.[4] For the development of state-of-the-art biorefineries
13 different approaches have been highlighted in the literature[5] including (i) the valorisation of the
14 non-carbohydrate components of biomass (e.g. lignin, proteins), (ii) interdisciplinary development
15 and research work and (iii) custom-designed and locally produced enzyme mixtures. Furthermore,
16 the viability of the scale-up of technologies to commercial scale can be aided by conditional and
17 economic optimisation of the system via extensive process modelling e.g. models for the enzymatic
18 hydrolysis of lignocellulose such as the modified Holtzapple–Caram–Humphrey–1 kinetic model[6], a
19 kinetic model considering heterogeneity[7] or mathematical modelling. [8]

20

21 One potential source of biomass for biorefineries is draff, also known as spent grain, which is
22 produced as a by-product from the brewing and distilling industries. For example, in Scotland alone
23 the Malt Whisky Industry produces 684 000 tonnes annually,[9] consisting mainly of barley grain
24 residues.[10] Spent grains such as draff have been used traditionally as animal feed, although this is
25 changing. One reason for this change is that this biowaste decomposes rapidly and so its use is time

1 sensitive. Its short shelf life and seasonal demands have enforced a disposal requirement on
2 distilleries and breweries which is a significant economic expense. As part of the strategy to avoid
3 this, spent grains are increasingly being used in anaerobic digestion (AD)[11] and combined heat and
4 power (CHP)[12] initiatives, providing some concern in the farming community over feed supplies.

5

6

<INSERT FIGURE 1 HERE>

7

8 The major chemical components of draff are cellulose and hemicellulose (mainly arabinoxylan[14]
9 and β -1,3;1,4-glucan[15]), as well as a significant amount of protein (Figure 1).[11] Conversion of the
10 high carbohydrate content into biochemicals and biofuels, *e.g.* via microbial fermentation, could
11 provide a high value application.[11,12] More details on alternative applications of draff can be
12 found in previously published reviews.[16–19] One possible approach for the valorisation of draff
13 that is currently being explored involves a thermal pretreatment followed by enzymatic hydrolysis to
14 generate a ‘sugar platform’ which can then undergo bacterial fermentation to produce biofuels
15 (ABE).[20] Key challenges in this approach include controlling the generation of microbial inhibitors
16 during the biomass pretreatment[21–23] and the cost of the required enzyme cocktail.[24,25]

17

18 Previously, we[26] and others[27–29] have shown that high-alcohol organosolv, particularly
19 butanosolv, pretreatments can deliver cellulose pulps that are highly suitable for enzymatic
20 hydrolysis. High yields of hemicellulose and lignin-derived product streams are also formed via this
21 pretreatment and are amenable to further upgrading. Given the potential of draff as a biorefinery
22 feedstock we were interested in investigating whether a butanosolv pretreatment could be used to
23 facilitate ABE fermentation of the cellulose component of draff. From the five recovery stages
24 discussed in the literature[30] three stages, the extraction (i.e. butanosolv pretreatment), the

1 isolation and purification (i.e. chromatography) and the product formation (i.e. freeze drying) steps
2 were explored. We also wanted to assess the co-product streams derived from the hemicellulose
3 and lignin components. One advantage of the selected pretreatment is that it uses (bio)butanol, a
4 biorenewable solvent, and so potentially facilitates a circular economy-type approach.[31]

5

6 **2 MATERIALS AND METHODS**

7 **2.1 General Considerations**

8 All chemicals used were obtained from commercial sources and used without further purification.
9 The draff biomass was a kind donation from Celtic Renewables. Commercial Cellic[®] CTec2 enzyme
10 mixture was kindly donated by Novozymes (Denmark) and used as received. Cellic[®] CTec3 enzyme
11 mixture (Novozymes, Denmark) was kindly donated by Celtic Renewables and used as received. The
12 elemental analysis was carried out by the Elemental Analysis Service at the London Metropolitan
13 University.

14

15 **2.2 NMR analysis**

16 Nuclear magnetic resonance (NMR) spectra were acquired on the following instruments: Bruker
17 AVIII-HD 700 (¹H, 700 MHz; ¹³C, 175 MHz), Bruker AVIII-HD 500 (¹H, 500 MHz; ¹³C, 126 MHz), Bruker
18 AVIII 500 (¹H, 500 MHz; ¹³C, 126 MHz) and Bruker AVII 400 (¹H, 400 MHz; ¹³C, 100 MHz). Chemical
19 shifts were expressed as δ in units of ppm. D₂O and *d*₆-DMSO solvents were used as lock for all NMR
20 spectra. 0.03 V/V % dimethyl sulfoxide was added to D₂O and was used as an internal reference in
21 the assignment of spectra. Data processing was carried out using MestReNova 12.0.3 (Windows) and
22 TopSpin 4.0.5 (Windows). Volume integration of cross peaks in 2D HSQC spectra was performed
23 using TopSpin 4.0.5 (Windows). Figures were generated using InScape 0.92.4.

24

1 **2.3 Butanosolv pretreatment of draff**

2 The previously reported butanosolv pretreatment procedures[26,32] were followed where the
3 lignocellulosic biomass, draff, was gently refluxed in a mixture of 95:5 V/V *n*-butanol and 4 M
4 aqueous hydrochloric acid (10 mL g⁻¹) for 6 h. The mixture was allowed to cool, filtered and the
5 residual pulp washed with a mixture of 9:1 V/V acetone and water (10 mL g⁻¹) and air dried for 48 h.
6 The filtrate was concentrated *in vacuo* and the resultant gum-like residue was taken up in a mixture
7 of 9:1 V/V acetone and water (5 mL g⁻¹). The dissolved residue was precipitated by drop-wise
8 addition into rapidly stirred water (50 mL g⁻¹). Following complete (NH₄)₂CO₃ was added to aid
9 flocculation. The precipitated *pseudo* lignin was separated from the aqueous hemicellulose-derived
10 stream by filtration. When required the filtrate was extracted with ethyl acetate (3 x 2 mL mL⁻¹) and
11 the resulting aqueous phase was freeze dried giving a caramel-like solid while the organic phase was
12 dried over MgSO₄ and concentrated *in vacuo* resulting in a yellow viscous oil. Small scale extractions
13 (15 g draff) were performed in triplicate, while the large scale extraction (800 g draff) was executed
14 once.

15

16 **2.4 Fermentation**

17 *Clostridium saccharoperbutylacetonicum* NCIMB 12606 was purchased from National Collection of
18 Industrial, Food and Marine Bacteria (Aberdeen, Scotland) and maintained cryogenically at -80°C.
19 Cryogenic stocks consisted of cultures grown to exponential phase on TYA medium to which 5 %
20 (w/v) glucose and glycerol was added to give a 15% (v/v) concentration per cryovial. One cryovial
21 was defrosted slowly on ice and 1 ml of the thawed culture was used to inoculate 20 ml volumes of
22 TYA supplemented with 1 % (w/v) xylose (for butoxylated xylose (**6α/β**) fermentation) or 1 % (w/v)
23 glucose (for the cellulose pulp fermentations), these were grown overnight at 34°C under an
24 atmosphere of N₂: CO₂: H₂ (80:10:10) in a Whitley A85 anaerobic workstation (Don Whitley
25 Scientific). A 5 % (v/v) volume of this culture inoculum was then used to inoculate 50 ml volumes of

1 TYA supplemented with either 5 % (w/v) xylose or butoxylated xylose (**6 α / β**) (for butoxylated xylose
2 fermentation); 5 % (w/v) butanosolv cellulose pulp or Sigmacell cellulose type 50 (for the cellulose
3 pulp fermentations). All media was pH adjusted to pH 6.2 with KOH 50% solution (Acros Organics)
4 prior to bacterial inoculation. The fermentations were conducted for 72 hours with constant
5 agitation provided by the use of a WTW OxiTop IS 12 inductive stirring system platform and addition
6 of magnetic stirrers to culture flasks. Butoxylated xylose (**6 α / β**) fermentations were carried out in
7 replicates of five and fermentations of the cellulose pulp in triplicate.

8

9 **3 RESULTS AND DISCUSSION**

10 Consideration of the different composition of draff (Figure 1) compared to our previously used
11 biomasses[26,32] led to an initial assessment of the use of a butanosolv pretreatment with draff
12 Although this pretreatment provided three product streams (Table 1) similar to our previous
13 studies[26,32], a significant difference in the nature of the obtained lignin stream was encountered.
14 As part of the standard butanosolv process, sodium sulfate is added to aid the flocculation of lignins
15 which are prone to form colloidal suspensions (common for herbaceous feedstocks in our
16 experience).[32] In this study with draff, the precipitation of the (pseudo) lignin fraction also
17 required the addition of a flocculant. However, it was found that ammonium carbonate, a volatile
18 salt, could be used as a traceless flocculant instead of sodium sulfate, simplifying the overall work-up
19 procedure (Figure 2).

20

21 <INSERT FIGURE 2 HERE>

22 Due to differences in the structure of the material obtained (vide infra), the term 'pseudo lignin'
23 (rather than lignin) is used throughout to refer to the material obtained at the point in the
24 procedure where lignin would normally be isolated (Figure 2). The overall positive mass balance

1 (Table 1, 110.3-116.5 wt%) was consistent with previous studies[26,32] and likely results from the
2 incorporation of a significant quantity of the solvent, butanol, into some of the product streams
3 (vide infra). Based on this initial assessment we decided to carry out an in-depth investigation into
4 each of the product streams.

5

6

<INSERT TABLE 1 HERE>

7

8 **3.1 Cellulose Pulp**

9 The potential for using the butanosolv-derived draff cellulose pulp (CP) in a biorefinery context was
10 tested by enzymatic hydrolysis of the CP with the commercial enzyme cocktail Cellic® CTec2
11 (Novozyme, Denmark) (Figure 3a). As a comparison, a draff pulp prepared using a mild acid
12 hydrolysis pretreatment (0.5 wt% H₂SO₄, 140 °C, 1.5 hr)[33] and the untreated draff were included.
13 This analysis showed that the butanosolv-derived CP performed better, releasing 55 wt% reducing
14 sugars after 72 hours (*c.f.* mild acid hydrolysis pulp and untreated draff which released 35 wt% and
15 15 wt% respectively over the same time period, Figure 3a).

16

17

<INSERT FIGURE 3 HERE>

18

19 In addition, the butanosolv CP was shown to be suitable for ABE fermentation with a simultaneous
20 saccharification and fermentation (SSF) experiment leading to the production of acetone, n-butanol
21 and ethanol (ABE) as products (Figure 3b) with maximum solvent yields reaching 16 g/100 g for CP.
22 No negative impacts of the CP on the growth of *C. saccharoperbutylacetonicum* or solvent
23 production were observed, suggesting the absence of inhibitors. Whilst total solvent production

1 levels using CP appeared lower than when an equal amount of Sigmacell cellulose control was used
2 (Figure 3b), it should be noted that CP contained only 51 wt% fermentable sugars (Table 2) as
3 compared to 100% in the Sigmacell cellulose control. This value (51%) is almost in agreement with
4 the amount of reducible sugars in CP as determined by the enzymatic hydrolysis (55%, Figure 3a). At
5 present, the identity of the material that constitutes the rest of the CP is unknown.

6

7

<INSERT TABLE 2 HERE>

8

9 Whatever the nature of this material, it does not impact on the performance of the fermentation,
10 with CP delivering a higher level of solvent production based on the amount of sugars present,
11 relative to the control (CP - 16g/100g solvent produced; *c.f.* Sigmacell 24g/100g solvent produced).
12 This result seems promising compared to, for example the fermentation of glucose in an extractive
13 fermentation process with free cells by Darmayanti *et al.* [35] which resulted in 37.8 g/100 g ABE
14 produced. The same study[35] showed that using immobilised cells can significantly improve solvent
15 yields (90-93.6 g/100g) highlighting an interesting avenue to explore in the future. The presence of a
16 high amount of butyric acid at the CP fermentation endpoint (Table 3) suggested that there was
17 insufficient sugar available for the culture to sustain the conversion of the organic acid into solvent.
18 Indeed, a near complete sugar utilisation in the CP fermentation confirmed this (Table 3).

19

20

<INSERT TABLE 3 HERE>

21

22 **3.2 A *pseudo* Lignin from Draff**

1 Having demonstrated the potential of the butanosolv-derived draff CP for the production of butanol,
2 attention turned to the characterisation of the (*pseudo*) lignin (PL) product stream. In general,
3 butanosolv pretreatments[26] deliver high quality lignins with a high α -butoxylated β -O-4
4 content.[26] Such lignins are organic-solvent soluble and can be used directly in controlled lignin
5 depolymerisations or as precursors to potential new materials.[26,36,37] Indeed, this is one of the
6 advantages of the butanosolv pretreatment over other organosolv processes. However, in the case
7 of draff, 2D HSQC NMR analysis of the PL revealed that this material was very different to a standard
8 butanosolv lignin. In particular the main cross peaks observed in the aromatic region of the spectrum
9 could be assigned to residual protein units containing phenylalanine and tyrosine[38] (Figure 4)
10 rather than the expected lignin aromatic units (only visible at lower contour levels, Figure 4 inset
11 box). This was consistent with the known relatively high protein content in draff,[13] which was
12 further supported in the elemental analysis of PL which indicated that a substantial amount of
13 nitrogen (Table 4; 2.87%) was retained in this product stream. Furthermore, the oxygenated alkyl
14 region showed only weak cross peaks characteristic of lignin units (*e.g.* Figure 4, structure B), with
15 the spectrum being dominated overall by signals corresponding to vinylic and aliphatic structures
16 (Figures 4 and S2, ^1H : 5.0-5.5; ^{13}C : 127-129 ppm and ^1H : 0.5-2.5; ^{13}C : 15-42 ppm respectively). This
17 probably results from the “high initial extractive content of draff”,[39] of which a large proportion is
18 a mixture of saturated and unsaturated lipids which partition with the hydrophobic fraction. HMBC
19 NMR analysis of PL (Figure 4, lower panel) indicated that the majority of the lipids were present in
20 the form of butyl esters, as evidenced by a correlation between the methylene protons of the ester
21 chain ($\text{RC}(=\text{O})\text{OCH}_2\text{CH}_2\text{CH}_2\text{CH}_3$; ^1H : 3.88-4.00 ppm) and the ester carbonyl groups (^{13}C : 172-174 ppm).
22 Additional correlations to these ester carbonyl carbons from signals in the aliphatic region were also
23 observed. This analysis suggests that the naturally occurring triglycerides in draff are trans-esterified
24 by butanol under the pretreatment conditions.

25

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24

<INSERT FIGURE 4 HERE>

Fractionation of PL by partial dissolution in acetone:petroleum ether (5:95) allowed for the isolation and characterisation of a significant amount of lipid derived material (*ca.* 40 wt% of PL). 2D HSQC and HMBC NMR analysis of the lipid-enriched soluble fraction confirmed the assignment of the major components as fatty acid butyl esters (Figure S1a), which are potentially useful compounds for bioenergy applications, for example as a biodiesel.[41,42] Removal of triglycerides and trace amounts of maltose prior to butanosolv pretreatment using a room temperature ethanol wash led to smaller quantities of PL being isolated (Figure S2 and Table S1). In addition to the fatty acid butyl esters, butyl ferulate (**1**) and butyl coumarate (**2**) were isolated from PL by column chromatography of the acetone:petroleum ether (5:95) fraction (Figure S1b). To the best of our knowledge this is the first report of trans-esterification of triglycerides, ferulates and coumarates under butanosolv pretreatment conditions. ¹H NMR analysis of the major (*ca.* 60 wt% of PL) insoluble component of the PL from the partial dissolution protocol revealed very broad signals suggesting that this was a high molecular weight, heterogeneous material (Figure S1c) with only trace amounts of fatty acid butyl esters still present. It is important to note, that based on the above analysis, the *pseudo* lignin obtained during the butanosolv treatment of draff appears to be a distinct class, compared to those that originate from the condensation of carbohydrate and lignin fragments during other pretreatment processes.[43–45] Whilst the PL clearly contained small quantities of butanosolv lignin, it was not possible to obtain lignin that was of the same level of purity as that previously reported by us using dioxasolv processing of draff.[46]

<INSERT TABLE 4 HERE>

1 3.3 The Fate of the Hemicellulose Component

2 The majority of the carbohydrate content in draff is present as hemicelluloses (22-28%
3 hemicelluloses *cf.* 17-25% cellulose[13]). A range of pretreatment methods[47], including lime pre-
4 treatment[48], wet oxidation[49], steam[50] and dilute acid pretreatments[51], are known to
5 partially depolymerise hemicellulose to form readily fermentable native monosaccharides such as
6 xylose. In contrast, the butanosolv pretreatment of draff leads to complete depolymerisation of the
7 hemicellulose component, as verified via DOSY NMR analysis and GPC analysis (Figure 5). However,
8 during a butanosolv pretreatment the hemicellulose depolymerisation is linked, at least in part, to
9 the incorporation of butanol at the anomeric position of many of the liberated
10 monosaccharides,[26] giving a unique product stream. As the hemicellulose-derived fraction (HDF)
11 was the largest isolated product stream from draff (53-64 wt%, Table 1), further investigations were
12 carried out into its composition.

13

14

<INSERT FIGURE 5 HERE>

15

16 As expected,[32] 2D HSQC NMR analysis of HDF indicated the presence of both butoxylated and
17 native glucose and xylose monosaccharides as the major components (Figure S3). Partitioning of the
18 HDF between EtOAc and water allowed for the selective, but not exclusive, enrichment of the
19 butoxylated monomeric sugars (Figure S4) into the EtOAc layer, [32] accounting for ca. 40 wt% of the
20 original HDF. The enrichment in butoxylated monosaccharides in the EtOAc extract allowed for the
21 identification of additional minor components, as well as those derived from glucose and xylose
22 (Figure S4). For example, signals corresponding to α/β -L-arabinopyranose (**3 α/β**), α/β -L-
23 arabinofuranose (**4 α/β**) and butyl α/β -L-arabinopyranoside (**5 α/β**) were observed (Figure 6),
24 consistent with the expected hemicellulose composition of draff which is known to contain D-xylose,

1 D-glucose and L-arabinose.[52] The analysis of L-arabinose is significantly more challenging than for
2 D-glucose and D-xylose due to the increased propensity of L-arabinose to exist in its native form as
3 furanose isomers (Figure 6a). For example, the signals at ^1H : 4.9; ^{13}C : 102.3 ppm (Figure 6a) were
4 assigned to the anomeric protons of the β -(**4 β**) furanose anomer while the signals at ^1H : 5.0; ^{13}C :
5 96.2 ppm (Figure 6a) were assigned to the anomeric protons of the α -(**4 α**) anomer of L-
6 arabinofuranose. To date it has only been possible to confirm the presence of the pyranose β -
7 (**5 β** ; ^1H : 4.0; ^{13}C : 103.7 ppm) and α -(**5 α** ; ^1H : 4.6; ^{13}C : 99.8 ppm) anomers of the butoxylated form of L-
8 arabinose in the EtOAc extract by comparison with authentic samples (Figure 6b). In addition,
9 further purification of the EtOAc extract of the HDF by column chromatography allowed for the
10 identification of butoxylated monosaccharides derived from D-glucuronic acid (Figure S5), the
11 formation and structure of which was verified by comparison with authentic samples (see ESI for
12 details of synthesis and analysis). One possible source of the D-glucuronic acid-derived compounds
13 could be the presence of glucuronoxylan and/or glucuronoarabinoxylan making up part of the
14 hemicellulose component in draff although the presence of these polymers has not been discussed
15 previously in the literature to the best of our knowledge.[52]

16

17 <INSERT FIGURE 6 HERE>

18

19

20

21 **3.4 Scale up and a circular economy approach**

22 As HDF was the major product stream from butanosolv processing of draff, it was decided to assess
23 whether the butoxylated monosaccharides found in the ethyl acetate extract were substrates for
24 ABE fermentation. Possible conversion of, for example, butyl α/β -D-xylopyranoside (**6 α/β**) to D-

1 xylose under the fermentation conditions would not only lead to the recovery of one equivalent of
2 solvent-derived butanol per molecule of $6\alpha/\beta$ (hydrolysis step in Scheme 1a), but also enable the
3 generation of additional butanol through ABE fermentation of the resulting D-xylose (0.3 eq. of
4 butanol produced for every eq. of D-xylose formed,[53] fermentation step in Scheme 1a). Studies
5 using an authentic sample of $6\alpha/\beta$ showed that under conditions where D-xylose could be
6 fermented, no solvent was produced from $6\alpha/\beta$ (Tables S3 and Figure S6).

7 In further attempts to integrate the butoxylated monosaccharides present in the HDF into our
8 proposed butanol production/recovery cycle (Figure 7), both chemical and enzymatic methods of
9 converting butoxylated to native monosaccharides were investigated. Complete hydrolysis of both
10 anomers of $6\alpha/\beta$ was achieved using aqueous TFA at 120 °C (Scheme 1b and Figure S7).
11 Alternatively, enzymatic hydrolysis could potentially offer the advantage of a greener and milder
12 approach as well as enabling selective processing of the anomeric mixture of butoxylated
13 monosaccharides. As a proof of concept study, the potential “debutoxylating” ability of the
14 commercially available enzyme cocktail, Cellic® CTec3, which is known to contain a range of
15 cellulases and hemicellulases, was assessed.[54] Treatment of an authentic sample of $6\alpha/\beta$ with
16 CTec3 resulted in the successful production of D-xylose by predominant conversion of the β anomer
17 (6α , Scheme 1b, Figure S8 and Table S3). Analogous results were obtained when authentic samples
18 of butoxylated D-glucose was used (Figure S9 and Table S4) and when the enzyme cocktail Cellic®
19 CTec3 was replaced with the previously commercialized CTec2 version (data not shown).

20

21

<INSERT FIGURE 7 HERE>

22

23

<INSERT SCHEME 1 HERE>

24

1 4 CONCLUSIONS

2

3 The biowaste used in this work, draff, is depleted of a large proportion of its hexose sugars
4 compared to the starting biomass (*e.g.* barley grain). However, draff still contains a significant
5 portion of carbohydrates with as much as 50- 60 % of the dry matter consisting of carbohydrates[55]
6 including glucans, starch, cellulose and arabinoxylans.[56] Here we reported a 63% carbohydrate
7 content for the draff used, constituting of 35 % glucan and 28 % pentosan sugars.

8

9 We show that butanosolv pretreatment can be used to fractionate this draff into 3 streams: a
10 cellulose enriched pulp; hemicellulose derived fraction; and *pseudo* lignin on both small (15 g) and
11 large scale (800 g). We have identified ammonium carbonate as a traceless flocculant for the *pseudo*
12 lignin. Enzymatic hydrolysis and ABE fermentation studies demonstrated that the pulp obtained
13 from this process is highly suited to downstream bio-processing and, in terms of solvent production,
14 outperformed commercial Sigmacell cellulose on a sugar basis during ABE fermentation. The
15 judicious use of draff in ABE fermentation to derive extra value from the spent material is of
16 significant industrial importance. For example, Celtic Renewables Limited has demonstrated that its
17 technology[57] can take advantage of all of the sugars present in draff, including the pentoses that
18 yeasts cannot traditionally use, demonstrating that draff can lead to high value commodity
19 chemicals and biofuels as well as being used as an animal feed.

20

21 Attempted characterisation of the *pseudo* lignin fraction revealed an unusual material consisting
22 mainly of fatty acid butyl esters, with small amounts of butyl ferulate, coumarate and lignin as well.
23 In line with previous studies the hemicellulose derived stream contained a mixture of butoxylated
24 and native monosaccharides, which were characterised by 2D HSQC, HBMC and DOSY NMR. In an

1 effort to recover butanol from the process and to facilitate downstream microbial processing of
2 butoxylated monosaccharides we demonstrate that the hydrolase enzymes in Cellic® CTec3 can
3 selectively hydrolyse butyl β -pyranoses to give native sugars, whilst global hydrolysis can be
4 achieved using aqueous TFA. The relevance of this work can be specifically appreciated in light of
5 emerging technologies such as membrane processes that could be incorporated from the initial
6 pretreatment step to the final solvent recovery.[58] This study highlights the potential of butanosolv
7 pretreatments for the fractionation of draff prior to enzymatic and microbial processing, for example
8 ABE fermentation, paving the way to a viable circular economy.

9

10 **ACKNOWLEDGEMENTS**

11 The authors would like to thank the University of St Andrews Interdisciplinary PhD funding scheme
12 (F.F. studentship) and the EPSRC-funded CRICAT Centre for Doctoral Training (studentship to I.P.;
13 EP/L016419/1) for PhD funding. C.S.L. thanks the Leverhulme Trust Early Career Fellowship (ECF-
14 2018-480) and the University of St Andrews. This project was supported by a grant from the
15 Lignocellulosic Biorefinery Network (LBNNet), a BBSRC-funded Network in Industrial Biotechnology
16 and Bioenergy (BBSRC NIBB) BB/L013738/1 (N.J.W., J.E.H and E.J.B.). We would also like to thank
17 Professor Martin Tangney and Colin Robertson of Edinburgh Napier University and Celtic
18 Renewables LTD for the kind gift of the sample of draff used in this study and for helpful discussions
19 and encouragement. We acknowledge expert NMR input from Dr Tomas Lebl and Dr James
20 Montgomery, University of St Andrews.

21

22 **REFERENCES**

23 [1] S.K. Bhatia, Biowaste-to-bioenergy using biological methods – A mini-review, *Energy Convers.*
24 *Manag.* 177 (2018) 640–660. <https://doi.org/10.1016/j.enconman.2018.09.090>.

- 1 [2] S. Takkellapati, T. Li, M.A. Gonzalez, An overview of biorefinery-derived platform chemicals
2 from a cellulose and hemicellulose biorefinery, *Clean Technol. Environ. Policy*. 20 (2018)
3 1615–1630. <https://doi.org/10.1007/s10098-018-1568-5>.
- 4 [3] N.G. Grobбен, G. Eggink, F. Petrus Cuperus, H.J. Huizing, Production of acetone, butanol and
5 ethanol (ABE) from potato wastes: fermentation with integrated membrane extraction, *Appl.*
6 *Microbiol. Biotechnol.* 39 (1993) 494–498. <https://doi.org/10.1007/BF00205039>.
- 7 [4] B. Kamm, P.R. Gruber, M. Kamm, *Biorefineries - industrial processes and products : status*
8 *quo and future directions*, Wiley-VCH, 2006.
- 9 [5] G. Dragone, A.A.J. Kerssemakers, J.L.S.P. Driessen, C.K. Yamakawa, L.P. Brumano, S.I.
10 Mussatto, Innovation and strategic orientations for the development of advanced
11 biorefineries, *Bioresour. Technol.* 302 (2020) 122847.
12 <https://doi.org/10.1016/j.biortech.2020.122847>.
- 13 [6] C. Liang, C. Gu, J. Raftery, M.N. Karim, M. Holtzapple, Development of modified HCH-1 kinetic
14 model for long-term enzymatic cellulose hydrolysis and comparison with literature models,
15 *Biotechnol. Biofuels*. 12 (2019) 34. <https://doi.org/10.1186/s13068-019-1371-5>.
- 16 [7] I. Caro, A. Blandino, A.B. Díaz, C. Marzo, A kinetic model considering the heterogeneous
17 nature of the enzyme hydrolysis of lignocellulosic materials, *Biofuels, Bioprod. Biorefining*. 13
18 (2019) 1044–1056. <https://doi.org/10.1002/bbb.1997>.
- 19 [8] H. Sitaraman, N. Danes, J.J. Lischeske, J.J. Stickel, M.A. Sprague, Coupled CFD and chemical-
20 kinetics simulations of cellulosic-biomass enzymatic hydrolysis: Mathematical-model
21 development and validation, *Chem. Eng. Sci.* 206 (2019) 348–360.
22 <https://doi.org/10.1016/j.ces.2019.05.025>.
- 23 [9] Shaiith, Sector Study on Beer, Whisky and Fish Final Report 2 | Sector Study on Beer, Whisky
24 and Fish, 2015. <http://www.zerowastescotland.org.uk/sites/default/files/ZWS645 Beer>

- 1 Whisky Fish Report_0.pdf (accessed January 8, 2019).
- 2 [10] S.I. Mussatto, G. Dragone, I.C. Roberto, Brewers' spent grain: generation, characteristics and
3 potential applications, *J. Cereal Sci.* 43 (2006) 1–14.
4 <https://doi.org/10.1016/J.JCS.2005.06.001>.
- 5 [11] M. Panjičko, G.D. Zupančič, L. Fanel, R.M. Logar, M. Tišma, B. Zelić, Biogas production from
6 brewery spent grain as a mono-substrate in a two-stage process composed of solid-state
7 anaerobic digestion and granular biomass reactors, *J. Clean. Prod.* 166 (2017) 519–529.
8 <https://doi.org/10.1016/J.JCLEPRO.2017.07.197>.
- 9 [12] A.S.N. Mahmood, J.G. Brammer, A. Hornung, A. Steele, S. Poulston, The intermediate
10 pyrolysis and catalytic steam reforming of Brewers spent grain, *J. Anal. Appl. Pyrolysis.* 103
11 (2013) 328–342. <https://doi.org/10.1016/J.JAAP.2012.09.009>.
- 12 [13] S.I. Mussatto, I.C. Roberto, Chemical characterization and liberation of pentose sugars from
13 brewer's spent grain, *J. Chem. Technol. Biotechnol.* 81 (2006) 268–274.
14 <https://doi.org/10.1002/jctb.1374>.
- 15 [14] H. Krawczyk, T. Persson, A. Andersson, A.-S. Jönsson, Isolation of hemicelluloses from barley
16 husks, *Food Bioprod. Process.* 86 (2008) 31–36. <https://doi.org/10.1016/J.FBP.2007.10.018>.
- 17 [15] A. Lazaridou, T. Chornick, C.G. Biliaderis, M.S. Izydorczyk, Composition and molecular
18 structure of polysaccharides released from barley endosperm cell walls by sequential
19 extraction with water, malt enzymes, and alkali, *J. Cereal Sci.* 48 (2008) 304–318.
20 <https://doi.org/10.1016/J.JCS.2007.09.011>.
- 21 [16] S.I. Mussatto, Brewer's spent grain: a valuable feedstock for industrial applications, *J. Sci.*
22 *Food Agric.* 94 (2014) 1264–1275. <https://doi.org/10.1002/jsfa.6486>.
- 23 [17] K.M. Lynch, E.J. Steffen, E.K. Arendt, Brewers' spent grain: a review with an emphasis on food
24 and health, *J. Inst. Brew.* 122 (2016) 553–568. <https://doi.org/10.1002/jib.363>.

- 1 [18] L.F. Guido, M.M. Moreira, Techniques for Extraction of Brewer's Spent Grain Polyphenols: a
2 Review, *Food Bioprocess Technol.* 10 (2017) 1192–1209. [https://doi.org/10.1007/s11947-](https://doi.org/10.1007/s11947-017-1913-4)
3 017-1913-4.
- 4 [19] P.S. Nigam, An overview: Recycling of solid barley waste generated as a by-product in
5 distillery and brewery, *Waste Manag.* 62 (2017) 255–261.
6 <https://doi.org/10.1016/J.WASMAN.2017.02.018>.
- 7 [20] Biorefining Potential for Scotland. Mapping bioresource arisings across Scotland, 2017.
8 [https://www.zerowastescotland.org.uk/sites/default/files/Biorefining Potential for Scotland](https://www.zerowastescotland.org.uk/sites/default/files/Biorefining%20Potential%20for%20Scotland%20Final%20report.pdf)
9 [Final report.pdf](https://www.zerowastescotland.org.uk/sites/default/files/Biorefining Potential for Scotland) (accessed January 8, 2019).
- 10 [21] D. Kim, Physico-Chemical Conversion of Lignocellulose: Inhibitor Effects and Detoxification
11 Strategies: A Mini Review, *Molecules.* 23 (2018) 309.
12 <https://doi.org/10.3390/molecules23020309>.
- 13 [22] E. Palmqvist, B. Hahn-Hägerdal, Fermentation of lignocellulosic hydrolysates. II: inhibitors and
14 mechanisms of inhibition, *Bioresour. Technol.* 74 (2000) 25–33.
15 [https://doi.org/10.1016/S0960-8524\(99\)00161-3](https://doi.org/10.1016/S0960-8524(99)00161-3).
- 16 [23] J. Zaldivar, A. Martinez, L.O. Ingram, Effect of selected aldehydes on the growth and
17 fermentation of ethanologenic *Escherichia coli*, *Biotechnol. Bioeng.* 65 (1999) 24–33.
18 [https://doi.org/10.1002/\(SICI\)1097-0290\(19991005\)65:1<24::AID-BIT4>3.0.CO;2-2](https://doi.org/10.1002/(SICI)1097-0290(19991005)65:1<24::AID-BIT4>3.0.CO;2-2).
- 19 [24] P. V Harris, F. Xu, N.E. Kreel, C. Kang, S. Fukuyama, New enzyme insights drive advances in
20 commercial ethanol production, *Curr. Opin. Chem. Biol.* 19 (2014) 162–170.
21 <https://doi.org/10.1016/j.cbpa.2014.02.015>.
- 22 [25] A.M. Lopes, E.X. Ferreira Filho, L.R.S. Moreira, An update on enzymatic cocktails for
23 lignocellulose breakdown, *J. Appl. Microbiol.* 125 (2018) 632–645.
24 <https://doi.org/10.1111/jam.13923>.

- 1 [26] C.S. Lancefield, I. Panovic, P.J. Deuss, K. Barta, N.J. Westwood, Pre-treatment of
2 lignocellulosic feedstocks using biorenewable alcohols: towards complete biomass
3 valorisation, *Green Chem.* 19 (2017) 202–214. <https://doi.org/10.1039/C6GC02739C>.
- 4 [27] Z. Zhang, D.W. Rackemann, W.O.S. Doherty, I.M. O’Hara, Glycerol carbonate as green solvent
5 for pretreatment of sugarcane bagasse, *Biotechnol. Biofuels.* 6 (2013) 153.
6 <https://doi.org/10.1186/1754-6834-6-153>.
- 7 [28] P. Obama, G. Ricochon, L. Muniglia, N. Brosse, Combination of enzymatic hydrolysis and
8 ethanol organosolv pretreatments: Effect on lignin structures, delignification yields and
9 cellulose-to-glucose conversion, *Bioresour. Technol.* 112 (2012) 156–163.
10 <https://doi.org/10.1016/J.BIORTECH.2012.02.080>.
- 11 [29] D. Pasquini, M.T.B. Pimenta, L.H. Ferreira, A.A.S. Curvelo, Sugar cane bagasse pulping using
12 supercritical CO₂ associated with co-solvent 1-butanol/water, *J. Supercrit. Fluids.* 34 (2005)
13 125–131. <https://doi.org/10.1016/J.SUPFLU.2004.11.005>.
- 14 [30] C.M. Galanakis, Recovery of high added-value components from food wastes: Conventional,
15 emerging technologies and commercialized applications, *Trends Food Sci. Technol.* 26 (2012)
16 68–87. <https://doi.org/10.1016/j.tifs.2012.03.003>.
- 17 [31] R. Liguori, V. Faraco, Biological processes for advancing lignocellulosic waste biorefinery by
18 advocating circular economy, *Bioresour. Technol.* 215 (2016) 13–20.
19 <https://doi.org/10.1016/j.biortech.2016.04.054>.
- 20 [32] I. Panovic, C.S. Lancefield, D. Phillips, M.J. Gronnow, N.J. Westwood, Selective Primary
21 Alcohol Oxidation of Lignin Streams from Butanol-Pretreated Agricultural Waste Biomass,
22 *ChemSusChem.* 12 (2019). <https://doi.org/10.1002/cssc.201801971>.
- 23 [33] X. Ji, H. Ma, Z. Tian, G. Lyu, G. Fang, J. Chen, H.A.M. Saeed, Production of Xylose from Diluted
24 Sulfuric Acid Hydrolysis of Wheat Straw, *BioResources.* 12 (2017) 7084–7095.

- 1 https://ojs.cnr.ncsu.edu/index.php/BioRes/article/viewFile/BioRes_12_4_7084_Ji_Xylose_Diluted_Sulfuric_Acid/5490 (accessed August 12, 2019).
- 2
- 3 [34] A. Sluiter, B. Hames, R. Ruiz, C. Scarlata, J. Sluiter, D. Templeton, D. Crocker, National
4 Renewable Energy Laboratory (U.S.), Determination of structural carbohydrates and lignin in
5 biomass : laboratory analytical procedure, 2008.
- 6 [35] R.F. Darmayanti, Y. Tashiro, T. Noguchi, M. Gao, K. Sakai, K. Sonomoto, Novel biobutanol
7 fermentation at a large extractant volume ratio using immobilized *Clostridium*
8 *saccharoperbutylaceticum* N1-4, *J. Biosci. Bioeng.* 126 (2018) 750–757.
9 <https://doi.org/10.1016/j.jbiosc.2018.06.006>.
- 10 [36] I. Panovic, J.R.D. Montgomery, C.S. Lancefield, D. Puri, T. Lebl, N.J. Westwood, Grafting of
11 Technical Lignins through Regioselective Triazole Formation on β -O-4 Linkages, *ACS Sustain.*
12 *Chem. Eng.* 5 (2017) 10640–10648. <https://doi.org/10.1021/acssuschemeng.7b02575>.
- 13 [37] I. Panovic, D.M. Miles-Barrett, C.S. Lancefield, N.J. Westwood, Preparation and Reaction of β -
14 O-4 γ -Aldehyde-Containing Butanosolv Lignins, *ACS Sustain. Chem. Eng.* (2019)
15 *acssuschemeng.9b01188*. <https://doi.org/10.1021/acssuschemeng.9b01188>.
- 16 [38] H. Kim, D. Padmakshan, Y. Li, J. Rencoret, R.D. Hatfield, J. Ralph, Characterization and
17 Elimination of Undesirable Protein Residues in Plant Cell Wall Materials for Enhancing Lignin
18 Analysis by Solution-State Nuclear Magnetic Resonance Spectroscopy, *Biomacromolecules.*
19 18 (2017) 4184–4195. <https://doi.org/10.1021/acs.biomac.7b01223>.
- 20 [39] O. Kanauchi, K. Mitsuyama, Y. Araki, Development of a Functional Germinated Barley
21 Foodstuff from Brewer's Spent Grain for the Treatment of Ulcerative Colitis, *J. Am. Soc. Brew.*
22 *Chem.* 59 (2001) 59–62. <https://doi.org/10.1094/ASBCJ-59-0059>.
- 23 [40] E.L. Ulrich, H. Akutsu, J.F. Doreleijers, Y. Harano, Y.E. Ioannidis, J. Lin, M. Livny, S. Mading, D.
24 Maziuk, Z. Miller, E. Nakatani, C.F. Schulte, D.E. Tolmie, R. Kent Wenger, H. Yao, J.L. Markley,

- 1 BioMagResBank, *Nucleic Acids Res.* 36 (2007) D402–D408.
2 <https://doi.org/10.1093/nar/gkm957>.
- 3 [41] E. Su, D. Wei, Production of Fatty Acid Butyl Esters Using the Low Cost Naturally Immobilized
4 *Carica papaya* Lipase, *J. Agric. Food Chem.* 62 (2014) 6375–6381.
5 <https://doi.org/10.1021/jf501993v>.
- 6 [42] G. Knothe, Dependence of biodiesel fuel properties on the structure of fatty acid alkyl esters,
7 *Fuel Process. Technol.* 86 (2005) 1059–1070. <https://doi.org/10.1016/J.FUPROC.2004.11.002>.
- 8 [43] P. Sannigrahi, D.H. Kim, S. Jung, A. Ragauskas, Pseudo-lignin and pretreatment chemistry,
9 *Energy Environ. Sci.* 4 (2011) 1306–1310. <https://doi.org/10.1039/C0EE00378F>.
- 10 [44] B. Cheng, X. Wang, Q. Lin, X. Zhang, L. Meng, R.-C. Sun, F. Xin, J. Ren, New Understandings of
11 the Relationship and Initial Formation Mechanism for Pseudo-lignin, Humins, and Acid-
12 Induced Hydrothermal Carbon, *J. Agric. Food Chem.* 66 (2018) 11981–11989.
13 <https://doi.org/10.1021/acs.jafc.8b04754>.
- 14 [45] X. Ma, X. Yang, X. Zheng, L. Chen, L. Huang, S. Cao, H. Akinosho, Toward a further
15 understanding of hydrothermally pretreated holocellulose and isolated pseudo lignin,
16 *Cellulose.* 22 (2015) 1687–1696. <https://doi.org/10.1007/s10570-015-0607-1>.
- 17 [46] R. Jastrzebski, S. Constant, C.S. Lancefield, N.J. Westwood, B.M. Weckhuysen, P.C.A.
18 Bruijninx, Tandem Catalytic Depolymerization of Lignin by Water-Tolerant Lewis Acids and
19 Rhodium Complexes, *ChemSusChem.* 9 (2016) 2074–2079.
20 <https://doi.org/10.1002/cssc.201600683>.
- 21 [47] A. Iram, D. Cekmecelioglu, A. Demirci, Optimization of dilute sulfuric acid, aqueous ammonia,
22 and steam explosion as the pretreatments steps for distillers' dried grains with solubles as a
23 potential fermentation feedstock, *Bioresour. Technol.* 282 (2019) 475–481.
24 <https://doi.org/10.1016/j.biortech.2019.03.009>.

- 1 [48] C.E. Wyman, B.E. Dale, R.T. Elander, M. Holtzappple, M.R. Ladisch, Y.Y. Lee, Coordinated
2 development of leading biomass pretreatment technologies, *Bioresour. Technol.* 96 (2005)
3 1959–1966. <https://doi.org/10.1016/j.biortech.2005.01.010>.
- 4 [49] A.S. Schmidt, A.B. Thomsen, Optimization of wet oxidation pretreatment of wheat straw,
5 *Bioresour. Technol.* 64 (1998) 139–151. [https://doi.org/10.1016/S0960-8524\(97\)00164-8](https://doi.org/10.1016/S0960-8524(97)00164-8).
- 6 [50] M. Galbe, G. Zacchi, A review of the production of ethanol from softwood, *Appl. Microbiol.*
7 *Biotechnol.* 59 (2002) 618–628. <https://doi.org/10.1007/s00253-002-1058-9>.
- 8 [51] H. Teramura, K. Sasaki, T. Oshima, F. Matsuda, M. Okamoto, T. Shirai, H. Kawaguchi, C. Ogino,
9 K. Hirano, T. Sazuka, H. Kitano, J. Kikuchi, A. Kondo, Organosolv pretreatment of sorghum
10 bagasse using a low concentration of hydrophobic solvents such as 1-butanol or 1-pentanol,
11 *Biotechnol. Biofuels.* 9 (2016) 27. <https://doi.org/10.1186/s13068-016-0427-z>.
- 12 [52] X. Zhou, W. Li, R. Mabon, L.J. Broadbelt, A Critical Review on Hemicellulose Pyrolysis, *Energy*
13 *Technol.* 5 (2017) 52–79. <https://doi.org/10.1002/ente.201600327>.
- 14 [53] T. Noguchi, Y. Tashiro, T. Yoshida, J. Zheng, K. Sakai, K. Sonomoto, Efficient butanol
15 production without carbon catabolite repression from mixed sugars with *Clostridium*
16 *saccharoperbutylacetonicum* N1-4, *J. Biosci. Bioeng.* 116 (2013) 716–721.
17 <https://doi.org/10.1016/J.JBIOSEC.2013.05.030>.
- 18 [54] Novozymes, Cellulosic ethanol Novozymes Cellic® CTec3-Secure your plant's lowest total cost
19 Application sheet, n.d.
20 http://s3.amazonaws.com/zanran_storage/bioenergy.novozymes.com/ContentPages/254650
21 [2386.pdf](http://s3.amazonaws.com/zanran_storage/bioenergy.novozymes.com/ContentPages/254650) (accessed June 20, 2019).
- 22 [55] K. Liu, Chemical Composition of Distillers Grains, a Review, *J. Agric. Food Chem.* 59 (2011)
23 1508–1526. <https://doi.org/10.1021/jf103512z>.
- 24 [56] T. Ezeji, H.P. Blaschek, Fermentation of dried distillers' grains and solubles (DDGS)

1 hydrolysates to solvents and value-added products by solventogenic clostridia, *Bioresour.*
2 *Technol.* 99 (2008) 5232–5242. <https://doi.org/10.1016/j.biortech.2007.09.032>.

3 [57] J.S. White, K.A. Leiper, M. Tangney, S. Messenger, *Patent: Process for the manufacture of*
4 *butanol or acetone*, PCT/GB2011/051238, 2011.

5 <https://patents.google.com/patent/CA2803127A1/da> (accessed December 18, 2019).

6 [58] P. Dey, P. Pal, J.D. Kevin, D.B. Das, Lignocellulosic bioethanol production: prospects of
7 emerging membrane technologies to improve the process – a critical review, *Rev. Chem. Eng.*
8 36 (2018) 333–367.

9

10

Figure 1

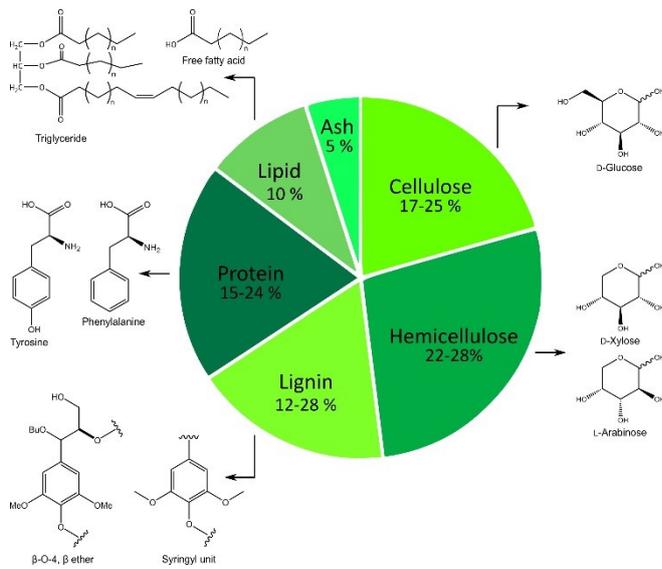


Figure 1. Apparent composition of brewer's spent grain or draff as reported by Mussatto *et al.*[13]

Structures of example monomeric units constituting the main components are shown.

Figure 2

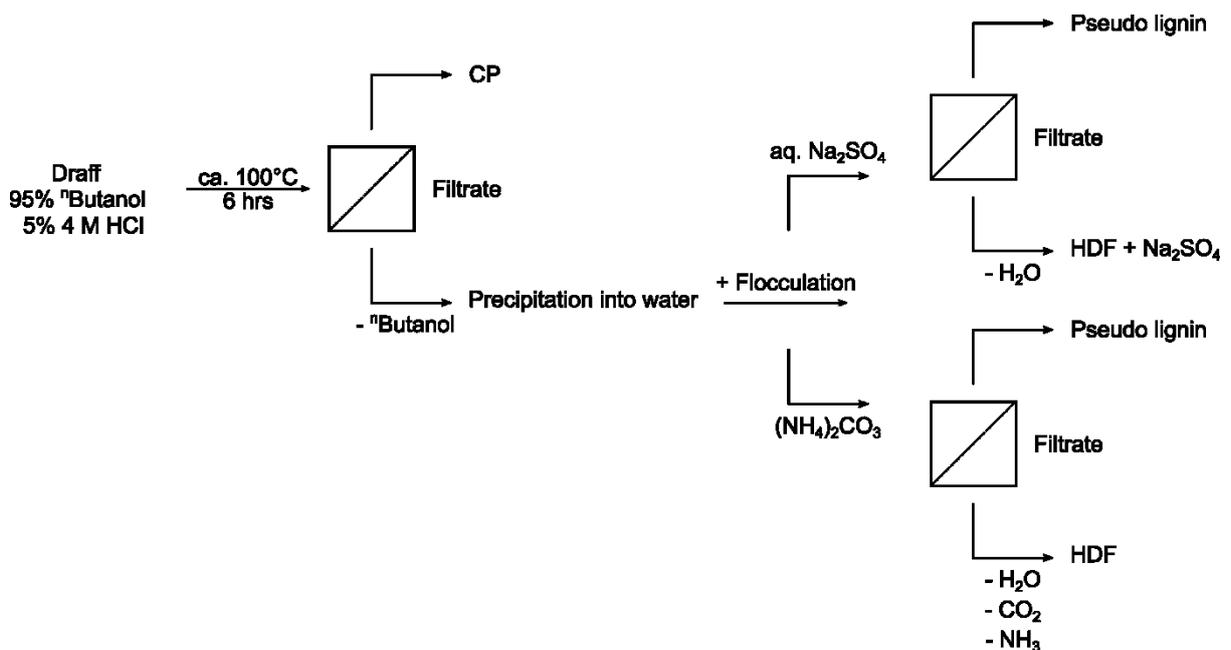


Figure 2. Schematic representation of the butanosolv pretreatment used in this study highlighting

the advantage of using a traceless flocculant (ammonium carbonate). CP = cellulose pulp; HDF = hemicellulose-derived fraction.

Figure 3

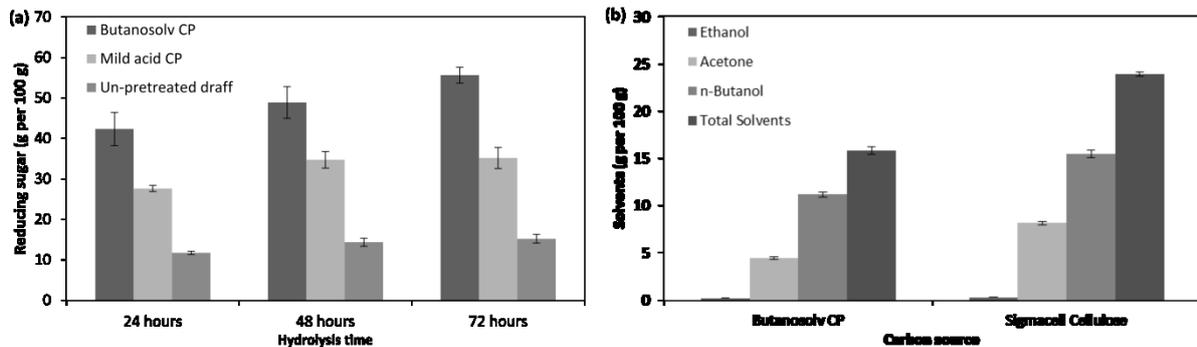


Figure 3. Assessment of the butanosolv-derived cellulose pulp (CP) for enzymatic hydrolysis and ABE fermentation. (a) Reducing sugars liberated via enzymatic hydrolysis of the starting draff and of the cellulose pulps (CPs) obtained from butanosolv or mild acid pretreatment of the draff, 5 wt % loading, 50°C, pH 5.5 and 10 FPU/g Cellic® CTec2; average of 3 replicates; (b) Solvent production during *C. saccharoperbutylacetonicum* fermentation of draff butanosolv CP and Sigmacell cellulose type 50, 5 wt % loading, at 52.5°C, pH 5.0 and 6 w/w % (g- Cellic® CTec3/100 g-cellulose); average of 3 replicates.

Figure 4

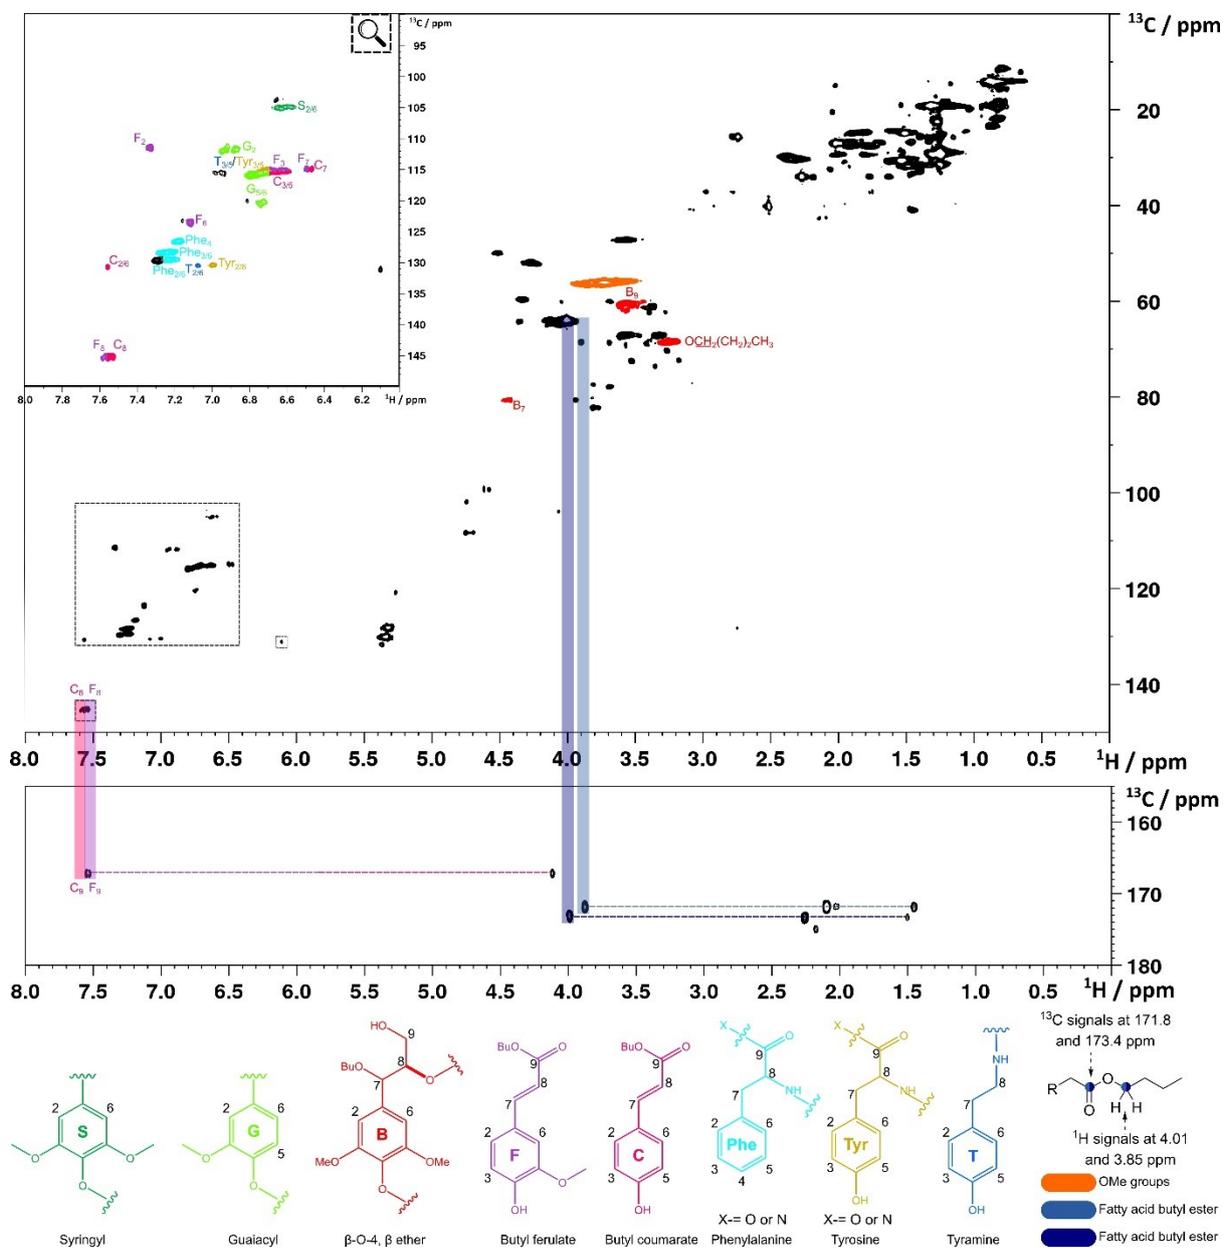


Figure 4. 2D HSQC and HMBC NMR spectra (700 MHz, d_6 -DMSO) of draff butanosolv-derived *pseudo* lignin with assignments of the major characteristic peaks. The aromatic region is also displayed at a lower contour level in the inset box. Correlations of signals corresponding to butyl ester groups are highlighted between the HSQC and HMBC spectra. Assignments were based on literature data[26,38,40] and are colour coded corresponding to the assigned structural element.

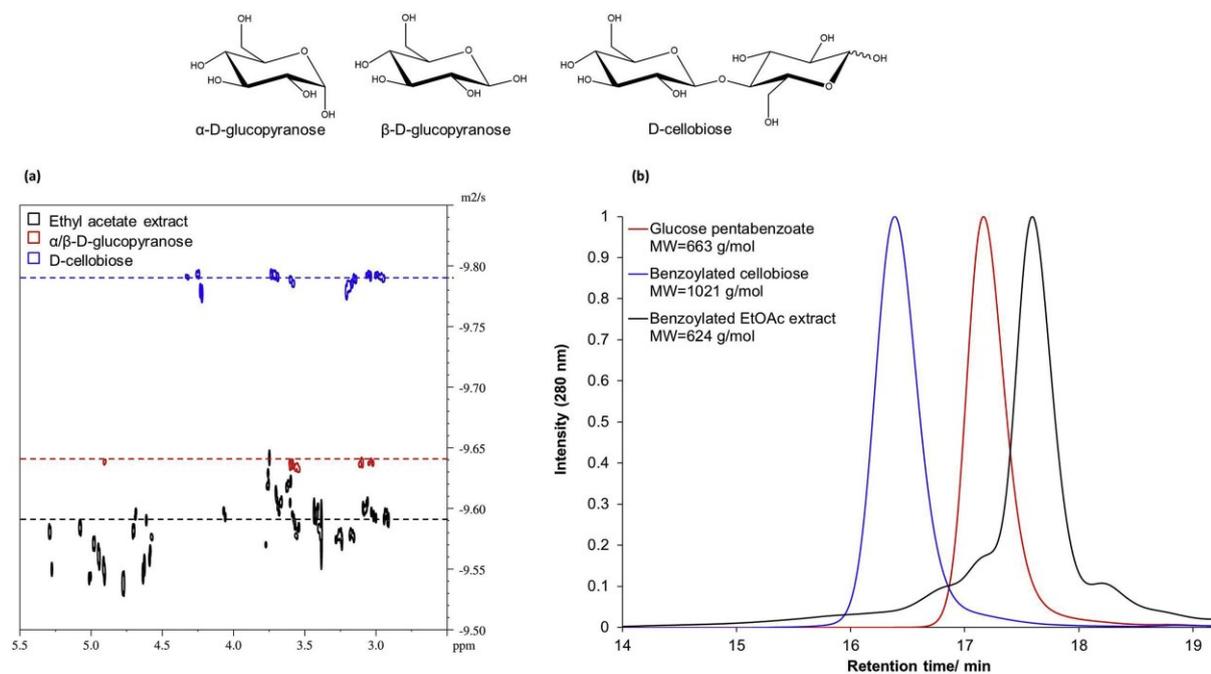


Figure 5. (a) DOSY NMR (700 MHz, d_6 -DMSO) plot of the ethyl acetate extract, α/β -D-glucopyranose and D-cellobiose. The average diffusion coefficient of each examined species is indicated by the corresponding dashed line for ease of interpretation. The decrease of the diffusion coefficients correlates to an increase in the molecular masses (*e.g.* a more negative, hence smaller, value of the diffusion coefficient ($-9.79 \text{ m}^2/\text{s}$ for D-cellobiose) correlates to a higher molecular weight species). **(b)** GPC analysis of the ethyl acetate extract, α/β -D-glucopyranose and D-cellobiose after benzoylation.

Figure 6

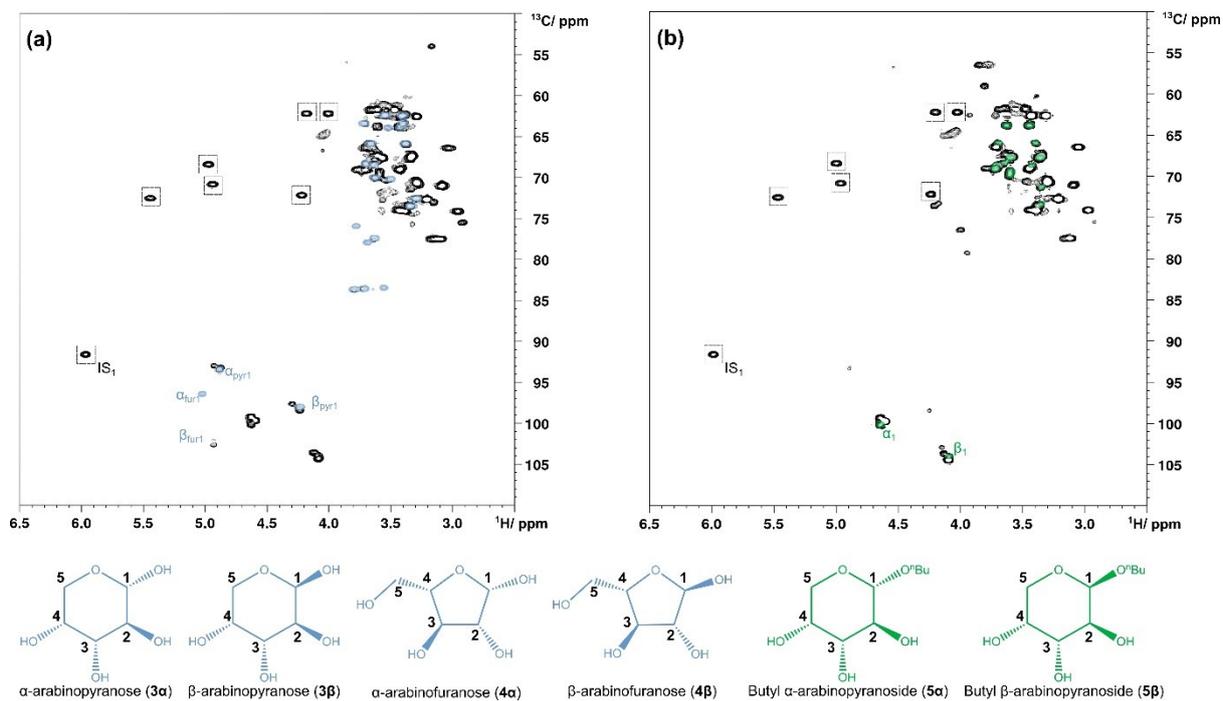


Figure 6. 2D HSQC NMR (700 MHz, d_6 -DMSO) analysis of: **(a)** aqueous layer from extraction of HDF (black) overlaid with the spectrum of an authentic sample containing α/β -L-arabinopyranose (**3 α /3 β**) and α/β -L-arabinofuranose (**4 α /4 β**) (blue) and **(b)** EtOAc extract of HDF (black) overlaid with the spectrum of an authentic sample of butyl α/β -L-arabinopyranoside (**5 α /5 β**) (green). α -D-glucose pentaacetate was used as an internal standard (IS), the signals for which are highlighted using boxes.

Figure 7

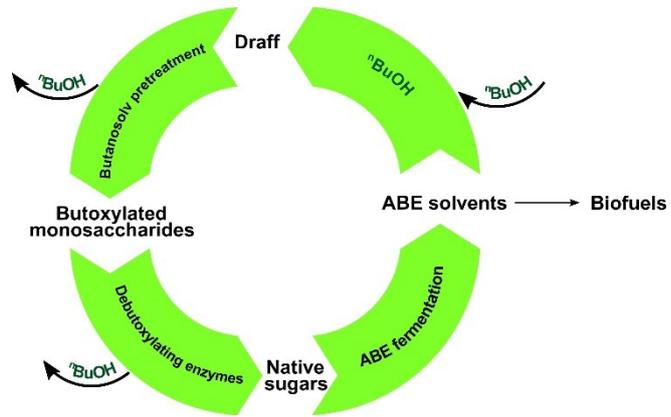


Figure 7. Our proposed circular economy approach based on “butanol production and formation” with draft used as the waste biomass.

Table 1

Product stream	Small scale pretreatment ^[a] (15 g)	Large scale pretreatment (800 g)
Cellulose pulp (CP)	28.5 ± 0.3 %	32.8 %
Hemicellulose- derived fraction (HDF)	64.2 ± 3.6 % ^[b]	53.4 %
<i>Pseudo</i> Lignin (PL) ^[c]	23.0 ± 0.6 % ^[b]	23.6 %
Mass balance	110.3 ± 1.5 % ^[d]	116.5 % ^[d]

Table 1. Product distribution resulting from the butanosolv pretreatment as weight % relative to the mass of the initial starting material on small scale (15 g draff) and on large scale (800 g draff).

^[a] Average of 3 repeated extractions. ^[b] For practical reasons the total yield was back-calculated after work-up of exactly ½ of the extraction liquor. ^[c] The term *pseudo* lignin is used throughout for reasons that are described in the main text. ^[d] Increase of the overall mass balance can be attributed to the incorporation of *n*-butanol into the HDF and PL product streams.

Table 2

Monosaccharide	Draff (g per 100g)	Butanosolv-derived cellulose pulp (CP) (g per 100 g)
Glucose	34.47 ± 0.75	43.62 ± 0.45
Xylose	19.46 ± 0.94	6.14 ± 0.51
Arabinose	8.74 ± 0.34	1.27 ± 0.02
Total monosaccharide	62.67 ± 1.85	51.15 ± 0.30

Table 2. Carbohydrate content of starting draff and butanosolv-derived cellulose pulp (CP) determined using the method of Sluiter *et al.*[34] Average of 3 replicates.

Table 3

	Butanosolv cellulose pulp	Sigmacell cellulose
Ethanol (g/L)	0.10 ±0.00	0.15 ±0.00
Acetone (g/L)	2.24 ±0.06	4.08 ±0.09
Butanol (g/L)	5.59 ±0.14	7.76 ±0.20
Total Solvents (g/L)	7.93 ±0.21	11.99 ±0.11
Acetic acid (g/L)	0.52 ±0.02	0.52 ±0.12
Butyric acid (g/L)	5.12 ± 0.17	5.22 ±0.31
Total acids (g/L)	5.64 ± 0.15	5.74 ±0.19
Sugar used (%)	88.01 ± 0.41	92.37 ± 0.23
Yield Butanol (g/g)	0.25 ±0.01	0.17 ±0.00
Yield Total Solvents (g/g)	0.35 ±0.01	0.26 ±0.00


Table 3. End products and solvent yields from the *C. saccharoperbutylacetonicum* fermentation of the butanosolv cellulose pulp and the Sigmacell cellulose type 50 control, 5 wt % loading, at 52.5°C, pH 5.0 and 6 w/w % (g- Cellic® CTec3/100 g-cellulose); average of 3 replicates.

Table 4

Sample	C(wt %) ^[a]	H(wt %) ^[a]	N(wt %) ^[a]	O(wt %) ^[a,b]	C/O ratio
Draff	49.87	7.19	4.44	38.51	1.29:1
CP	40.18	5.83	3.86	50.13	0.8:1
PL	62.46	8.30	2.87	26.38	2.37:1

Table 4. Elemental composition of the starting biomass, draff, the cellulose pulp (CP) and the draff-derived *pseudo* lignin (PL) resulting from butanosolv extraction.

^[a] Average of 2 repeats. ^[b] The oxygen content was determined by the subtraction method.

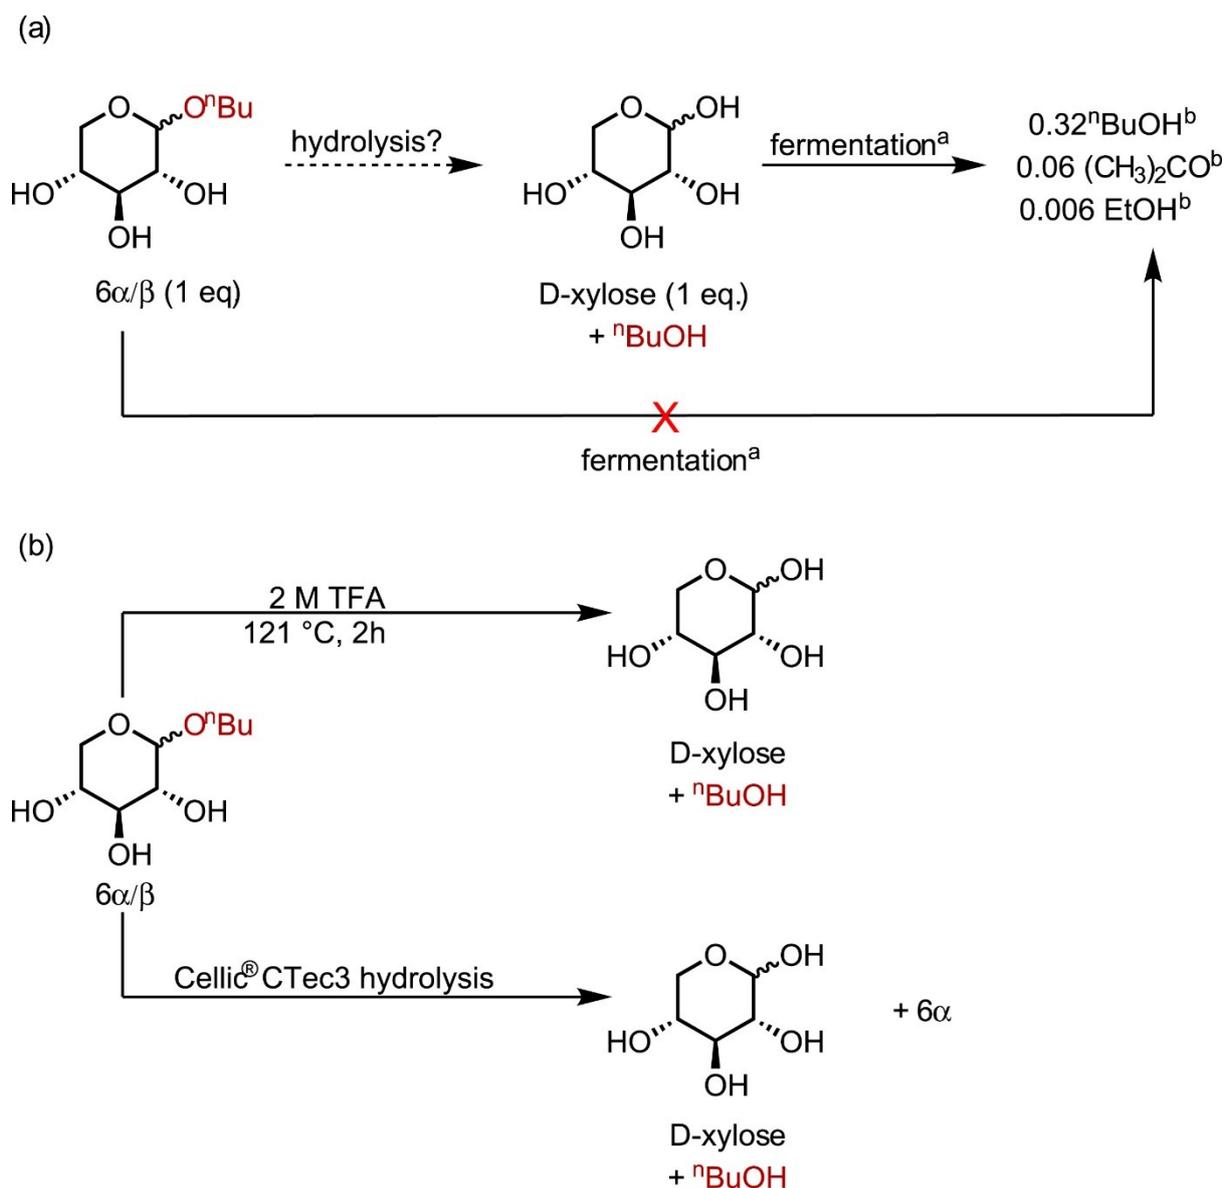

Scheme 1. Processing of butoxylated xylose ($6\alpha/\beta$). (a) Theoretical conversion of $6\alpha/\beta$ via ABE fermentation^[53] resulting in the theoretical production of 1.3 eq of *n*-butanol in total (top row). Results of fermentation experiments showed that fermentation $6\alpha/\beta$ does not lead to solvent production under the same conditions as fermentation of xylose (bottom row; Figure S6 and Table S2). ^aABE fermentation using *C. saccharoperbutylacetonicum*. ^bCalculated based on results shown in Table S2. (b) Chemical conversion of $6\alpha/\beta$ led to the complete regeneration of xylose, while enzymatic processing of $6\alpha/\beta$ led to the selective regeneration of xylose.